

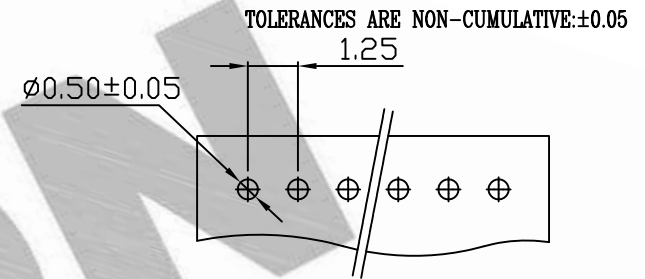
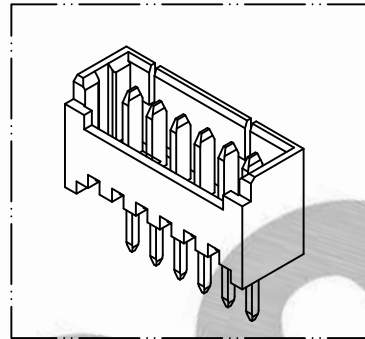
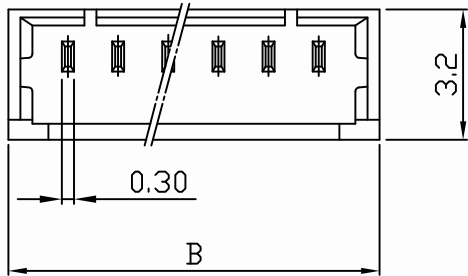


10 9 8 7 6 5 4 3 2 1

PART NO. 1251xxWV101
DWG NO. C1251WV

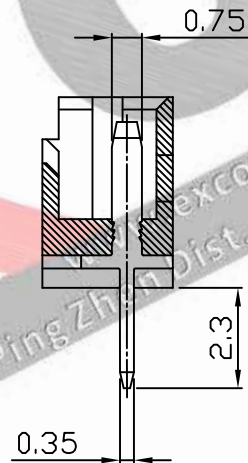

RECOMMENDED PCB LAYOUT
(PCB THK=1.0~1.6)

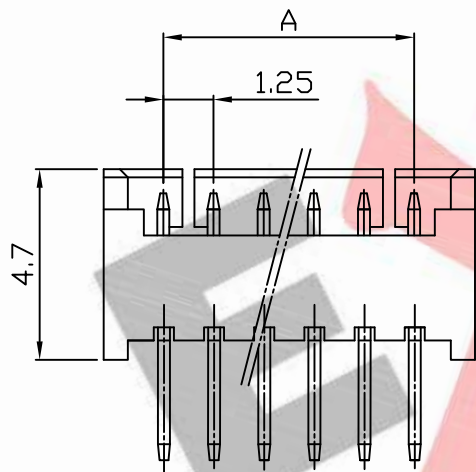

Dimensional & Ordering Information:

Part No.	Circuits	Dim A	Dim B
125102WV101	2	1.25	4.25
125103WV101	3	2.50	5.50
125104WV101	4	3.75	6.75
125105WV101	5	5.00	8.00
125106WV101	6	6.25	9.25
125107WV101	7	7.50	10.50
125108WV101	8	8.75	11.75
125109WV101	9	10.00	13.00
125110WV101	10	11.25	14.25
125111WV101	11	12.50	15.50
125112WV101	12	13.75	16.75
125113WV101	13	15.00	18.00
125114WV101	14	16.25	19.25
125115WV101	15	17.50	20.50

NOTE:

1. Wafer Material: Nylon 46
2. Plated: Tin-plated 50u"min.
3. Insulation resistance: 1000M ohm/min.
4. Withstand voltage: 250V AC/minute.
5. Current retang: 1A AC/DC.
6. Voltage rating: 100V AC/DC

UNLESS OTHERWISE SPECIFIED TOLERANCES			
3 PLACE ±0.5 ±0.10			
2 PLACE ±1.5 ±0.25			
1 PLACE ±2.0 ±0.50			
ANGLE DIM			
REV.	REVISIONI		DIS DATE
SCALE	REV.	PAGE:	UNIT mm
5/1	A	1	THIRD ANGLE PROJECTION

UNLESS OTHERWISE SPECIFIED TOLERANCES
3 PLACE ±0.5 ±0.10
2 PLACE ±1.5 ±0.25
1 PLACE ±2.0 ±0.50
ANGLE DIM

DWG NO:

C1251WV

EXCON

EXCON TECHNOLOGY COMPANY

PART.NO

1251xxWV101

10 9 8 7 6 5 4 3 2 1